

6 Tips & Tricks

- Keep **Donor** and **Service Antennas** separated/isolated from each other for best performance
- For best performance, the cable between the **Outdoor Antenna** and GO unit should be as short as possible
- Use sealant if any connections are exposed to elements

7 Installation Process

For more **TELSTRA GO** features, go to **App Store** or **Google play** and download the mobile **Cel-Fi WAVE** app.

(NOTE: If you do not have a compatible smartphone, go to cel-fi.com/wave to download the Desktop app.)



The Cel-Fi WAVE app can help you optimize your system's performance.



Copyright © 2017 by Nextivity, Inc. U.S. Patents pending. All rights reserved. The Nextivity and Cel-Fi logos are registered trademarks of Nextivity Inc. All other trademarks or registered trademarks listed belong to their respective owners. Designed by Nextivity Inc in California. qsg_GO-Mobile-Telstra-Eng_17-0609



TELSTRA GO Mobile Quick Start Guide

Smart Signal Repeater



TELSTRA GO is an evolved **cellular repeater** design that can amplify cellular signals up to 70dB. Connect a single **Donor External Antenna** to receive the macro-network signals, and then a single indoor **Service Antenna** where you need service, and **TELSTRA GO** will do the rest automatically.


IN THE BOX

- TELSTRA GO Mobile Repeater
- Quick Start Guide • Donor & Service Antenna
- Warranty Card • Screws

For more information, visit: www.cel-fi.com

TELSTRA GO Mobile Installation


1 Install Donor Antenna

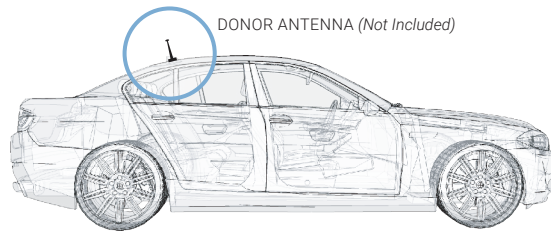

Mount your **Donor Antenna** on the exterior of the vehicle, towards the rear, according to its design, and the type of vehicle it's being used with. Make sure you consider the cable connection to the **TELSTRA GO** unit with your location choice.


For best performance make sure there is 50cm of metal around the base of the antenna.

2 Install Service Antenna

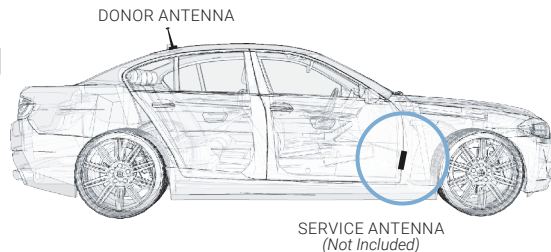

Install **Service Antenna** in the cab, towards the front, where coverage is needed. Ideally, there should be substantial material, like the metal of the roof, between the **Donor** and **Service Antennas**, to improve isolation.

3 Mount TELSTRA GO

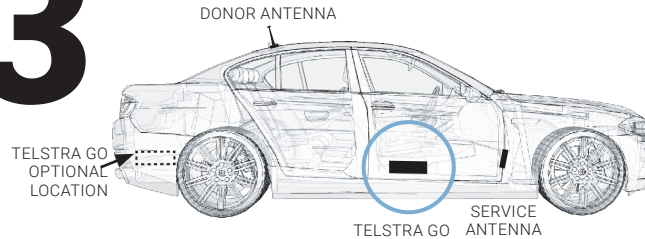



Find a good mounting location in your vehicle. Location should have airflow and be secure from contact with external objects.

Make sure the unit is within cable range of the 12V power supply on your vehicle.

Best to make sure all cable lengths support the intended mounting location BEFORE permanent mounting.

DO NOT plug in at this time.

5 Plug in TELSTRA GO & Select Mode

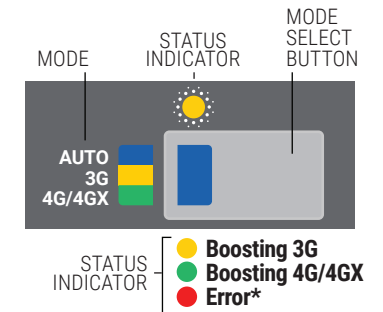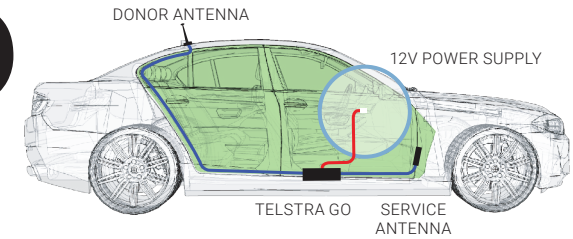

(*NOTE: if Error, go to troubleshooting at cel-fi.com/support)



Press the **MODE** button on the unit to select desired scanning mode. Status Indicator will blink during the setup process, and may take a few minutes to complete.



(OPTIONAL: use your smartphone to select mode. Download the **Cel-Fi WAVE** app, and follow the on-screen instructions.)

Bluetooth

4 Connect Donor & Service Antennas to the TELSTRA GO Unit

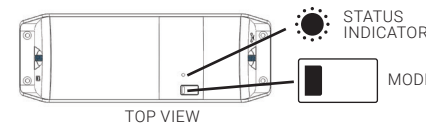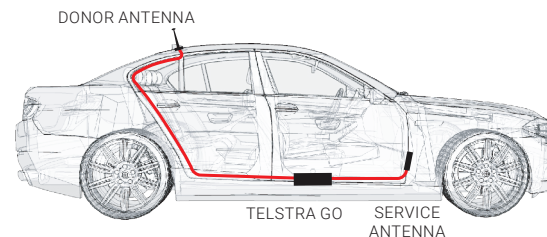

RIGHT SIDE: Donor Antenna Connector



LEFT SIDE: Service Antenna Connector